




- ❖ Italian made domestic operator, with reduced dimensions making this operator sleek & discreet.
- ❖ Maximum gate weight of 200kgs per leaf
- ❖ Designed for gates with a maximum width of 2.1-mtrs each leaf
- ❖ A reliable & silent surface mounted self-locking electro-mechanical operator, complete with multi-positions brackets & strong mechanical components
- ❖ Reduction unit manufactured with high quality gears & shafts
- ❖ Easy & trouble free to install thanks to the front articulation & to the two mechanical in built stops, which are adjustable in both opening & closing phases
- ❖ The new manual override unlocking device is operated from the top, making it rapid & trouble-free
- ❖ Strong & dependable rolled worm shaft with Ø 20mm spherical section for an easy & silent manual operation.

TECHNICAL DATA	BOB	BOB24
Motor power supply	230 Vac	24 Vac
Absorbed Power	230W	70W
Max Stroke	300 mm	270 mm
Max absorbed current	1 A	2,5 A
Mechanical stops	Opening & Closing	Opening & Closing
Opening time	19"	16.5"
Operating cycle	30%	Semi intensive use
Operating temp.	-20 / +70 C	-20 / +70 C
Protection level	IP 54	IP 54
Standard stroke	270 mm	270 mm
Thrust	1600 N	1600 N
Weight	8,2Kg	8,2Kg

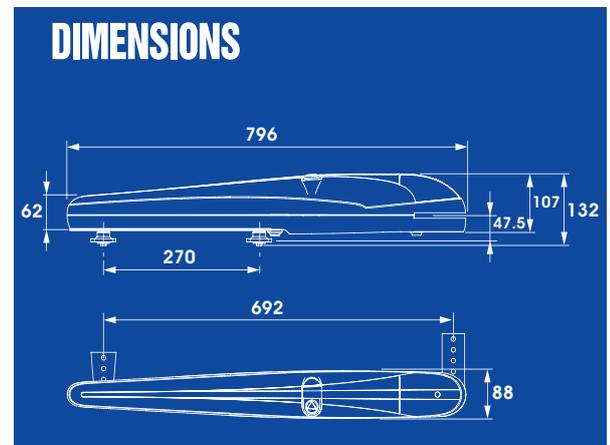

BOB KIT:

- 2 x BOB Operators
- 1 x Control board & built in receiver
- 2 x Transmitters