


I Ruote con supporto saldato a 2 cuscinetti - gola O per

NEW OMEGA NEW OMEGA 2
FLOOR HEAVY

- UK Wheels with welded support and two bearings - O groove
- D Laufrollen mit Stützplatten und zwei Lagern - O Nut
- F Roues à 2 roulements avec support soudé - gorge O
- E Ruedas con soporte soldado con 2 cojinetes - guía O para atornillar
- RUS Ролик с кронштейном под сварку с 2 подшипниками паз O

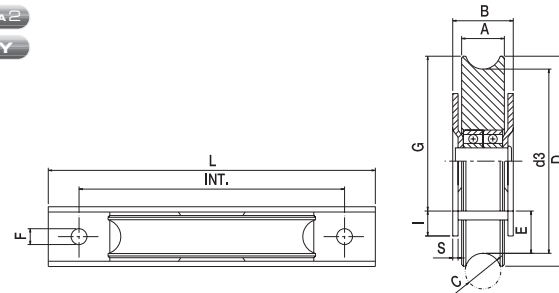

| Articolo - Article | | D | d3 | A | B | C | G | I | E | S | L | Interasse x F Wheelbase x F | Portata Capacity | | |
|-------------------------|------------------|-----|-----|----|----|----|----|----|----|----|-----|--------------------------------|---------------------|----|------|
| Riferimento - Reference | | ∅ | mm | mm | mm | mm | mm | mm | mm | mm | mm | mm | x1 | N° | |
| 1227 | PSOI RI 12 27 OS | 120 | 100 | 26 | 38 | 21 | 88 | 14 | 21 | 3 | 185 | 150 x ø9 | 350 | 6 | 13,3 |