


**I** Ruote con supporto esterno a 1 cuscinetto • gola V per **ANGULA**

**UK** Wheels with outer support with one bearing • V groove

**D** Laufrollen mit Stützplatten und einem Lager • V Nut

**F** Roues à 1 roulement avec support externe • gorge V

**E** Ruedas con soporte externo con 1 cojinete • guía V



ARTICOLO-ARTICLE	D	A	B	C	G	S	E	d1	LxHxS	PORTATA CAPACITY			€
Riferimento-Reference	Ø	mm	V	mm	mm	mm	mm	mm	mm	x 1	N°	X 1	
820 PV RT 80 20 VP	80	20	30	96°	62	3	9,5	65	70x40x3	140	12	9,2	
920PV RT 90 20 VP	90	20	30	96°	71	3	10,5	75	80x40x3	160	12	12	
1020 PV RT 10 20 VP	100	20	30	96°	82	3	9,5	85	90x40x3	180	12	15,4	
1220 PV RT 12 20 VP	120	20	30	96°	99	3	12	105	110x40x3	200	8	15,5	
1420 PV RT 14 20 VP	140	20	30	96°	116	3	16,5	125	120x40x3	230	4	10,8	



**I** Ruote con supporto esterno a 1 cuscinetto • gola U

**UK** Wheels with outer support with one bearing • U groove

**D** Laufrollen mit Stützplatten und einem Lager • U Nut



**F** Roues à 1 roulement avec support externe • gorge U

**E** Ruedas con soporte externo con 1 cojinete • guía U

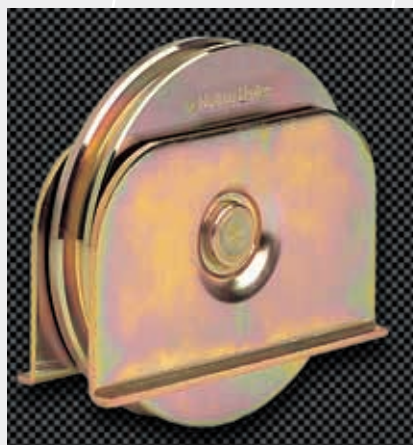



ARTICOLO-ARTICLE	D	A	B	C	G	S	E	d2	LxHxS	PORTATA CAPACITY			€
Riferimento-Reference	Ø	mm	U	mm	mm	mm	mm	mm	mm	x 1	N°	X 1	
820 PU RT 80 20 UP	80	20	30	7	62	3	10	65	70x40x3	140	12	9,2	
920 PU RT 90 20 UP	90	20	30	7	71	3	11	75	80x40x3	160	12	12	
1020 PU RT 10 20 UP	100	20	30	7	82	3	10	85	90x40x3	180	12	15,4	
1220 PU RT 12 20 UP	120	20	30	7	99	3	12,5	105	110x40x3	200	8	15,5	
1420 PU RT 14 20 UP	140	20	30	7	116	3	16	125	120x40x3	230	4	10,8	

- I Ruote con supporto esterno a 2 cuscinetti • gola V per **ANGULA**
- UK Wheels with outer support with two bearings • V groove
- D Laufrollen mit Stützplatten und zwei Lagern • V Nut
- F Roues à 2 roulements avec support externe • gorge V
- E Ruedas con soporte externo con 2 cojinete • guía V

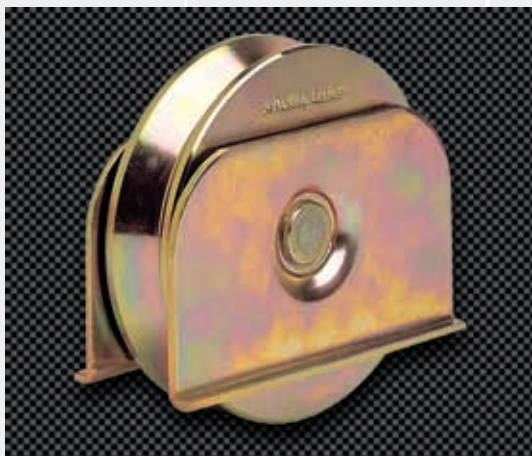



ARTICOLO-ARTICLE	D	A	B	C	G	S	E	d1	LxHxS	PORTATA CAPACITY			€
Riferimento-Reference	Ø	mm	V	mm	mm	mm	mm	Ø	mm	kg x 1	N°	kg	X 1
1030 PV	RT 10 30 VP	100	30	42	96°	82	3	7	80	90x50x3	300	12	18,1
1230 PV	RT 12 30 VP	120	30	42	96°	99	3	9,5	100	110x50x3	350	6	15,5
1430 PV	RT 14 30 VP	140	30	42	96°	116	3	13	120	120x50x3	400	4	14,7

- I Ruote con supporto esterno a 2 cuscinetti • gola U
- UK Wheels with outer support with two bearings • U groove
- D Laufrollen mit Stützplatten und zwei Lagern • U Nut
- F Roues à 2 roulements avec support externe • gorge U
- E Ruedas con soporte externo con 2 cojinete • guía U

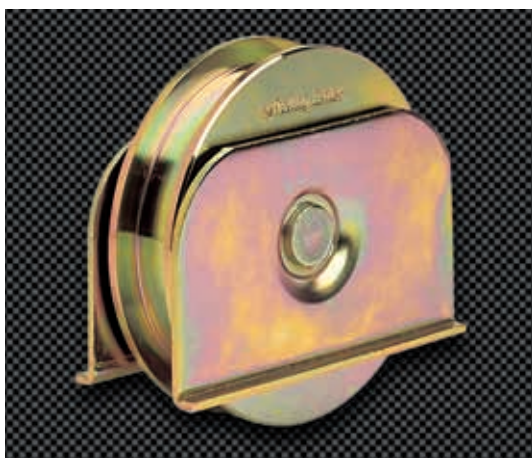

ARTICOLO-ARTICLE	D	A	B	C	G	S	E	d2	LxHxS	PORTATA CAPACITY			€
Riferimento-Reference	Ø	mm	U	mm	mm	mm	mm	Ø	mm	kg x 1	N°	kg	X 1
1030 PU	RT 10 30 UP	100	30	41	21	82	3	6	80	90x50x3	300	12	18,1
1230 PU	RT 12 30 UP	120	30	41	21	99	3	8,5	98	110x50x3	350	6	15,5
1430 PU	RT 14 30 UP	140	30	41	21	116	3	12,5	118	120x50x3	400	4	14,7

- I Ruote con supporto esterno a 2 cuscinetti • gola O per **NEW OMEGA** **NEW OMEGA 2**
- UK Wheels with outer support with two bearings • O groove
- D Laufrollen mit Stützplatten und zwei Lagern • O Nut
- F Roues à 2 roulements avec support externe • gorge O
- E Ruedas con soporte externo con 2 cojinete • guía O

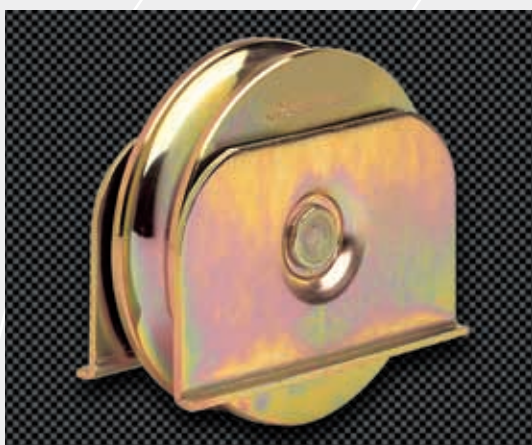

ARTICOLO-ARTICLE	D	A	B	C	G	S	E	d3	LxHxS	PORTATA CAPACITY			€
Riferimento-Reference	Ø	mm	O	mm	mm	mm	mm	Ø	mm	kg x 1	N°	kg	X 1
830 PO	RT 80 30 OP	80	30	42	21	62	3	7,5	61	80x50x3	250	12	11,9
1030 PO	RT 10 30 OP	100	30	42	21	82	3	7,5	81	90x50x3	300	12	18,1
1230 PO	RT 12 30 OP	120	30	42	21	99	3	10	101	110x50x3	350	6	15,5
1430 PO	RT 14 30 OP	140	30	42	21	116	3	15,5	121	120x50x3	400	4	14,7